



### Features:

- No UV or IR light radiation.
- Provide 120° beam angles.
- Easy Installation: Using Existing GX53 Fixture.
- Low Power Consumption: Less than 5 Watts.
- Long lifetime: 25000 hours (L<sub>70</sub>).
- Sturdy Construction:
  - PC and Plastic aluminium alloy lamp Shell.
- High CRI: 70-85.
- Correlated Color Temperature: 2700-6500K.
- Operating temperature: -20°C~+60°C.
- 85-265V AC input.
- LED Type: 2835 LED/48PCS.

### Benefits:

- Energy Cost Savings:  
Over 60% Compared to Incandescent.
- Solid-State:  
High-Shock & High-Vibration Resistant,  
Both Electrical and Mechanical
- Energy Cost Savings:
- Eco-Friendly:  
No Mercury, No Lead Content
- No Hazardous Emissions:  
No UV or IR Radiation
- Constant Light Output:  
Even Lighting, Non-Halation

### Applications:


- Cabinet Light
- Showcase light
- Other Lighting

**Product Specifications:**

Lens	PC
Lamp Shell	Plastic aluminium alloy
Input Voltage	85-265V AC
Base Type	Gx53
Wattage	3W
Power Factor	PF $\geq$ 0.8
Operating frequency	50-60Hz
Operating Temperature	-20°C ~ +60°C
Storage Temperature	-30°C ~ +60°C
Net Weight per piece (Kg)	0.06Kg
Certifications	RoHS Compliant


**Product Selection Guide:**

Part No.	Beam Angle	Total Lumens	CCT	Color	CRI
GX53-WW5WC	120°	400 $\pm$ 5%	2700-3500K	Warm White	$\geq$ 70
GX53-W5WC	120°	500 $\pm$ 5%	6000-6500K	White	$\geq$ 70

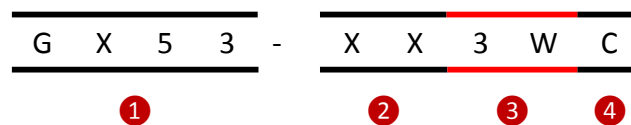

①	GX53:	Product Type.
②	XX:	W-White, WW- Warm White
③	5W:	The single LED power is 5W
④	C:	AC85-265V


### Product Dimensions:

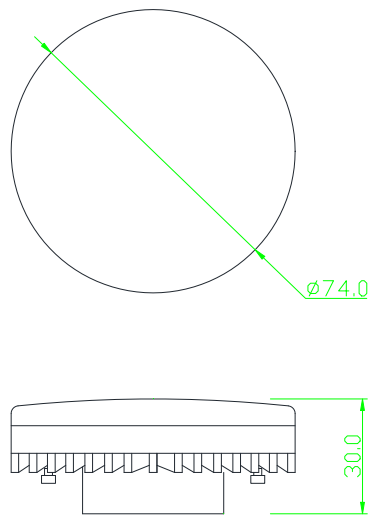

### Notes:

1. All dimensions unit in mm
2. Tolerances are  $\pm 0.5$ mm unless otherwise noted.

**Package Dimension:**

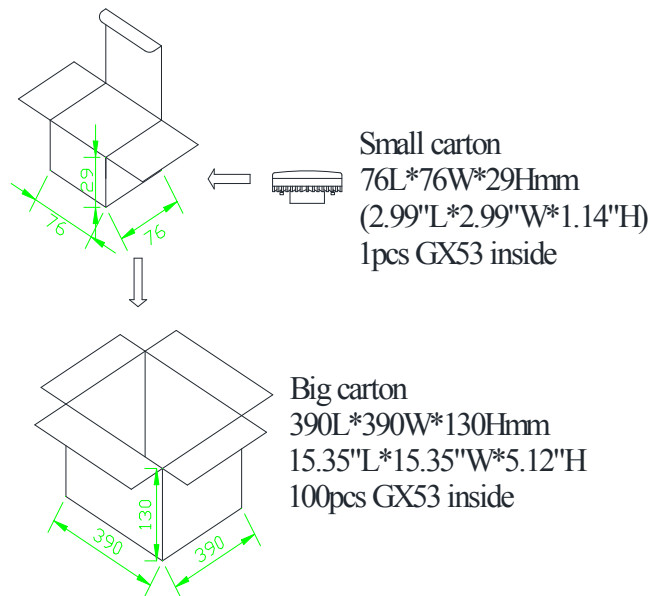

**Installation Instructions and Warnings:**

- Turn off power before inspection, installation, or removal.
- Not for use where exposed to the weather
- Do not use in totally enclosed fixtures.
- Not for use with dimmers.
- Please make sure to use a suitable adapter. Please mind the minimum load of your adapter.

**Notes:**

The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.